

**SPECIFICATION**

Range: **CLIP**

Design: **SI Design**

Partition system consisting of Snowsound Technology sound-absorbing panels made of polyester and fitted with harmonic steel mounting clips, and uprights made of extruded aluminium with sheet steel bases. Uprights and bases are painted with matt black epoxy powders.

4-way upright with a  $\varnothing$  35 mm circular section with 4 grooves for inserting panels. The upper part is completed with a threaded black painted steel cap. The upright is attached to the base by means of an M10x40 countersunk screw.

The bases are made of 5 mm thick sheet steel, available in the circular  $\varnothing$  30 cm or elongated 4 x 46.5 cm versions, equipped with special holes for the insertion of a notched ring nut made of steel to be positioned between the base and upright.

Each panel fits into the groove of the upright thanks to 4 clips, fixed directly to the edge of the panel itself, and a black painted zamak aligner.

H 180 cm upright version has a black painted steel spacer that allows the panel to be raised 21 cm off the ground.

Snowsound Technology sound-absorbing partition panel description:

Both faces with convex section 36 mm thick, consisting of an internal padding in variable density polyester fiber. The density decreases moving towards the heart of the panel, which is covered on both sides with Trevira CS® polyester fabric, solidly applied to the padding. The panel is double sided, with same characteristics on both sides. It is characterized by the rigid edge obtained by the manufacturing process itself, without any supporting and/or stiffening frame.

The panel has **Euroclass B-s2, d0** fire reaction.

The panel is **Greenguard Gold certified**, which validates its low VOC emission and its contribution to the quality of the indoor environment.






The panel is **100% recyclable** and has no detectable formaldehyde content according to UNI EN 717-2. It does not contain felts or other organic materials that are hardly recyclable.

The panel has been tested in reverberation chamber according to UNI EN ISO 354 and obtained **"Acoustic Absorption Class A"**, in accordance with UNI EN ISO 11654.


Panel dimensions:

119 x h 119 cm, 119 x h 159 cm

59 x h 119 cm, 59 x h 159 cm

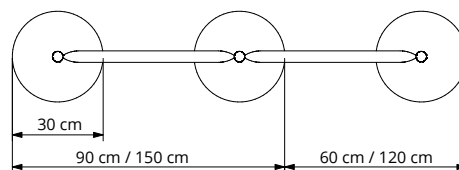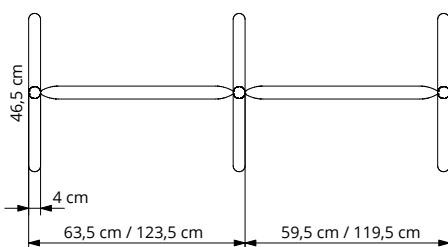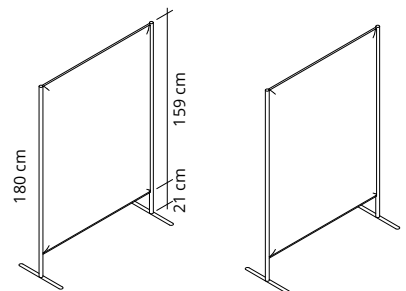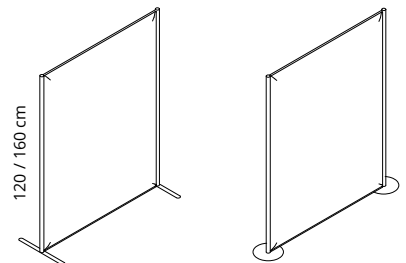

Compositions examples:

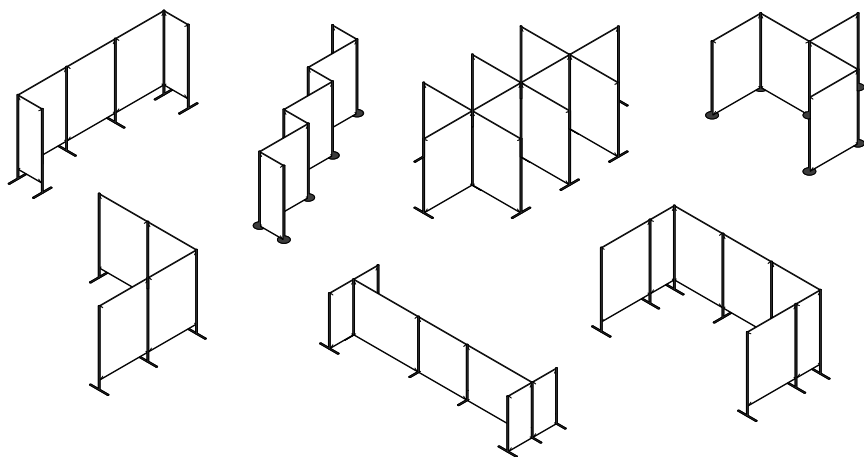


Easy assembly (video)

Panel colours:



Frame colours:



RAL 9005